

Name: **8ight Race Roller Setup Sheet-Stable/Easy to drive**

Date:

Event:

City:

State:


Track: **Revelation Raceway**

Track ☐ Indoor ☐ Tight ☐ Smooth ☐ Hard Packed ☐ Blue Groove ☐ Wet ☐ Low Bite ☐ High Bite
Conditions ☒ Outdoor ☒ Open ☒ Rough ☐ Loose/Loamy ☐ Dry ☐ Dusty ☒ Med Bite ☐ Other _____

Front Suspension

Toe: _____ 2 degrees out
Ride Height: _____ 27mm
Camber: _____ -1 degree
Caster: _____ stock / 20 degrees
Sway Bar: _____ 2.7mm
Piston/Oil: _____ 54 / Losi 40wt
Spring: _____ Silver
Limiter/Droop: Check overall shock length
Overall Shock Length: 95mm from center to center
Steering Ackerman: Long
Bump Steer: _____ Down
Camber Link: _____ #3
Shock Location: _____ #2 / inside
Front Diff Fluid: _____ Losi 3000
Receiver Battery Type: Losi 2000 mah Lipo Receiver Pack


Center Diff Fluid: _____ Losi 5000

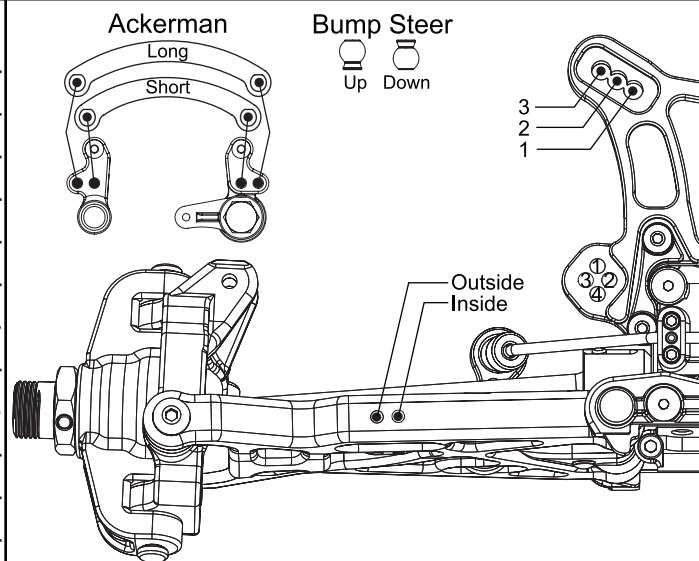

Notes: 8ight T servo saver spring.
Use 2.3mm sway bar if you need more steering.

Rear Suspension

Toe: _____ 3 degrees
Anti-Squat: _____ 2 degrees
Ride Height: _____ 28mm
Camber: _____ -1.5 degrees
Rear Hub Spacing: Two spacers behind the hub.
Sway Bar: _____ 2.3mm
Piston/Oil: _____ 56 / Losi 25wt
Spring: _____ Green
Limiter/Droop: Check overall shock length
Overall Shock Length: 105.5mm from center to center.
Camber Link: _____ #2 - A
Shock Location: _____ #2 / inside
Rear Diff Fluid: _____ Losi 2000

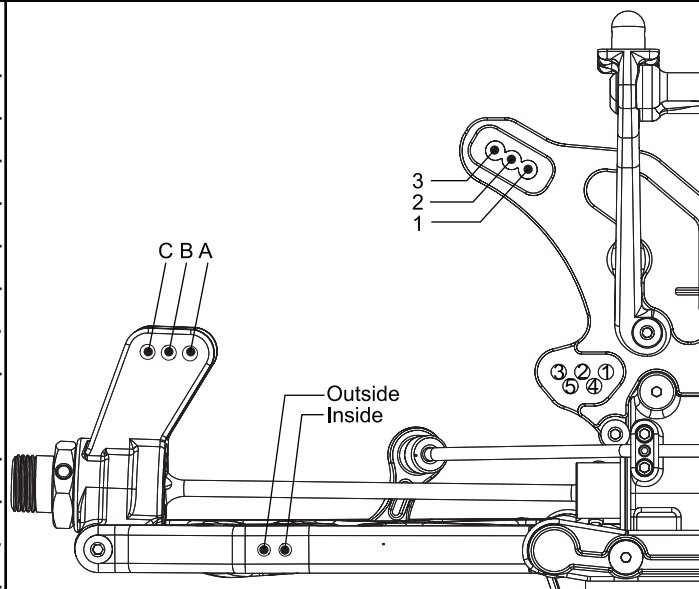


Notes: Move rear hubs back if you need more on-power steering. Run gold springs with the alum. clutch shoes and green with the plastic shoes if you want less punch.

Engine

Engine: .21 Fuel: _____
Glow Plug: _____ Head Clearance: _____
Pipe/Header: _____ Gearing: 13 / 48

Clutch



Clutch Shoes and Springs Info
2 aluminum with silver springs.
2 plastic with glod springs.

Tires

	Type	Compound	Insert
Front:	_____	_____	_____
Rear:	_____	_____	_____
Notes:	_____		